

PRODUCT INSTALLATION GUIDE

Deluxe Heatshield w/ Ghost Ring Sights



HARDWARE INCLUDED

[2] 6 x 3/8" Phillips Head Screw

[2] 6-32 x 1" Machine Screw

[2] 6-32 x 3/4" Socket Head Cap Screw

[2] 6-32 Hex Nut


TOOLS NEEDED

Phillips Head Screwdriver




Warning: When handling a firearm, always follow the proper handling procedures at all times. Failure to follow these procedures could result in serious damage, injury, or death. We are not responsible for damage to property, injury, or death resulting from improper installation, misuse or modification of products. If you are not comfortable completing any of the following steps, or do not have the proper tools enlist the help of your local gunsmith. We are not responsible for components that are damaged due to improper installation.

⚠ You must first install Ghost Ring Sights to the heatshield before installation on your firearm

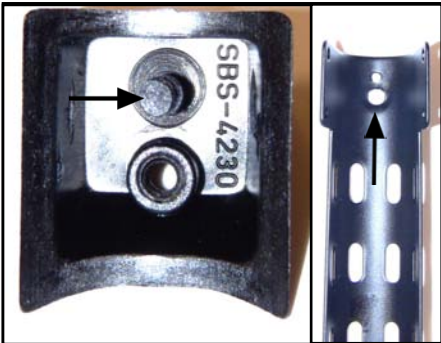


1

Begin by placing the guide post of the small Ghost Ring Sight into the pilot hole at the end of the Heatshield as seen in Figure 1.

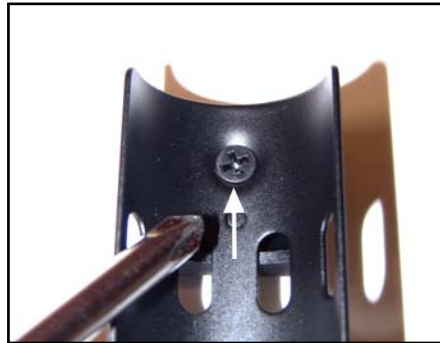

4

Using a phillips head screw driver, install the provided #6 x 3/8" screw at the rear of the heatshield as seen in Figure 4. Make sure the ghost ring sight is centered before the screw is tightened.

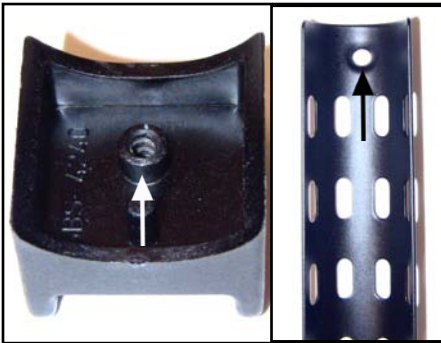

2

To install the rear ghost ring sight begin by placing the guide post of the large ghost ring sight into the pilot hole at the rear of the heatshield as seen in Figure 2.



5

Begin by removing the barrel from the shotgun. Once removed widen the front clamp on the front of the heatshield 1/8" and slide the heatshield over the barrel and slide to the rear. Bend the rear tabs to clamp tightly onto the barrel using a cloth to prevent scratches on the heatshield as seen in Figure 5.



3

Using a phillips head screw driver, install the provided #6 x 3/8" screw at the front of the heatshield as seen in Figure 3. Make sure the ghost ring sight is centered before the screw is tightened.




6

After reinstalling the barrel, slide the heatshield so that it touches the receiver, except on the Winchester which needs to be kept 1/2" from the receiver as seen in Figure 6.

PRODUCT INSTALLATION GUIDE


Deluxe Heatshield w/ Ghost Ring Sights

PAGE 2

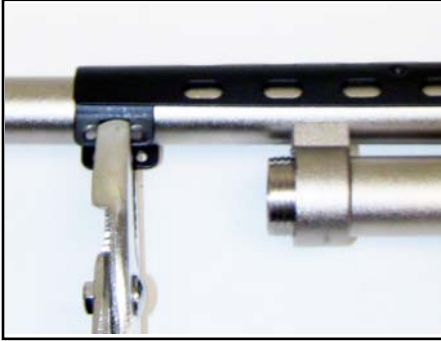

7

Tighten the front clamp around the barrel as seen in Figure 7.

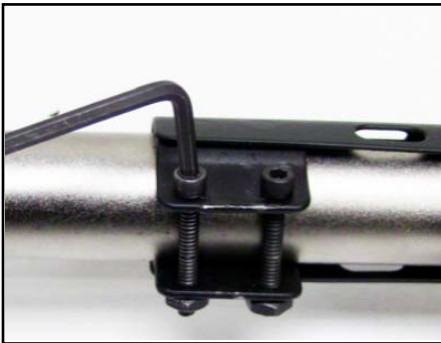

8

Install the provided (2) screws and nuts and tighten securely as seen in Figure 8.

NOTE: Slide the forend to check for any interference between the forend and the heatshield. File tabs or forend as required.