

PRODUCT INSTALLATION GUIDE

Ruger® 10/22® AR/22 Stock Kit 2 & 4 Inch Picatinny Rail Installation

HARDWARE INCLUDED

[2] #10 x 5/8" Plastite Screw



TOOLS NEEDED

Flat Head Screwdriver

Phillips Head Screwdriver

Allen Set




Warning: When handling a firearm, always follow the proper handling procedures at all times. Failure to follow these procedures could result in serious damage, injury, or death. We are not responsible for damage to property, injury, or death resulting from improper installation, misuse or modification of products. If you are not comfortable completing any of the following steps, or do not have the proper tools enlist the help of your local gunsmith. We are not responsible for components that are damaged due to improper installation.




1

To install the 2" or 4" picatinny rail, begin by placing the rail at any location on the raised part of the forend as seen in Figure 1.

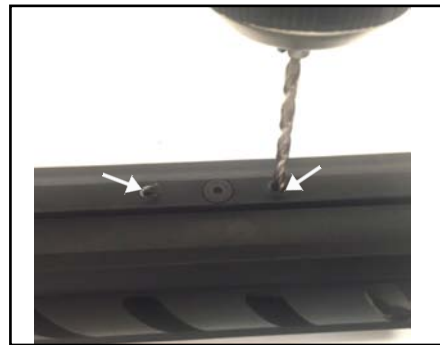

4

Using a 9/64 drill bit, drill a hole on each mark as seen in Figure 4.

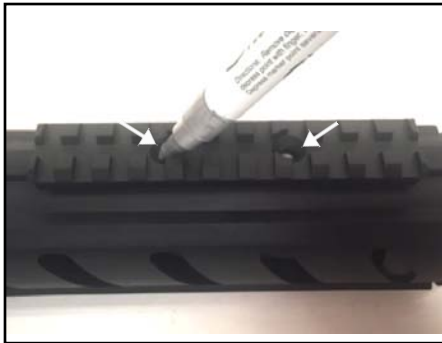

2

Using a paint pen, mark the holes on the forend as seen in Figure 2.



5

Using the provided #10 x 5/8" Plastite Phillips Head Screw and a Phillips Head Screwdriver, tighten until the screw is snug as seen in Figure 5 to complete the picatinny rail installation.



3

Next, remove the rail as seen in Figure 3. You will now see where the holes to fasten the rail will be drilled.

MADE IN
THE USA

LIMITED LIFE TIME WARRANTY

LIMITED LIFE TIME WARRANTY